



Hamburg - Germany


## Temporized wall mounted tap Art. Nr. 50034

Self closing wall mounted tap with movable S-Spout, 1/2" connection, with wall rosette. The body is made of chrome plated cast brass. Easy to install and specially designed to allow simple maintenance. **standard** cartridge with **prefixed** time from 3 to 25 seconds ( $\pm 10$  seconds). With this cartridge the time is pre-regulated as customers request with a delay time. Here below you can find different options clearly explained:

### CHOICE OF FLOW DELAYS

- A approx 3 sec.
- B approx 4/6 sec. C approx 8/12 sec.
- D approx 12/16 sec.
- E approx 15/25 sec. standard or adjustable

The self closing cartridges can be supplied with A flow rate regulation:

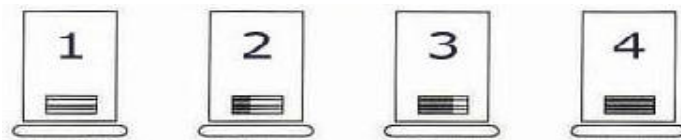

	1	2	3	4
<b>BAR</b>	<b>L/M</b>	<b>L/M</b>	<b>L/M</b>	<b>L/M</b>
0.5	14	13.1	9.3	4.9
1	18.8	16.7	12.5	5.2
1.5	22.7	21.8	14.7	5.5
2	26.1	24.5	19.8	6.0
3	35	31.1	24.2	7.9

MINIMUM WORKING PRESSURE 0.1 BAR MAXIMUM WORKING PRESSURE 3 BAR.

### ATTENTION:

- + If the water pressure is above 4 bar, a pressure reducer is always recommended.
- + the good working of the tap is guaranteed when the water is without impurity. It is important to clean the supply pipes and to install a filter.
- + For changing the water flow, take off the cartridge from the body using a key Nr. 24, then you have to turn cup (F) on the crown ring (E), choosing flow requested from position 1 (Full Open) to position 4 ( Full Closed). Tightening torque of cartridge must be 12 Nm.

